

# Beyond The Limit of Sight

Made for excellence



**FOTRIC 600 Series**

Fix-mount online cameras

# FOTRIC 600 Series

## Fix-mount online cameras


The FOTRIC 600 series online camera can automatically and continuously monitor and record temperature anomaly in accordance with user's preset rules, which can help optimize industrial process and reinforce quality control;

Users also have access to with a series of sophisticated online analysis feature available in FOTRIC's AnalyzIR and open API SDK for customized features and functions.

---

### Main Application

- Research and development;
- Industrial processing;
- Perimeter security;
- Warehouse fire-prevention;

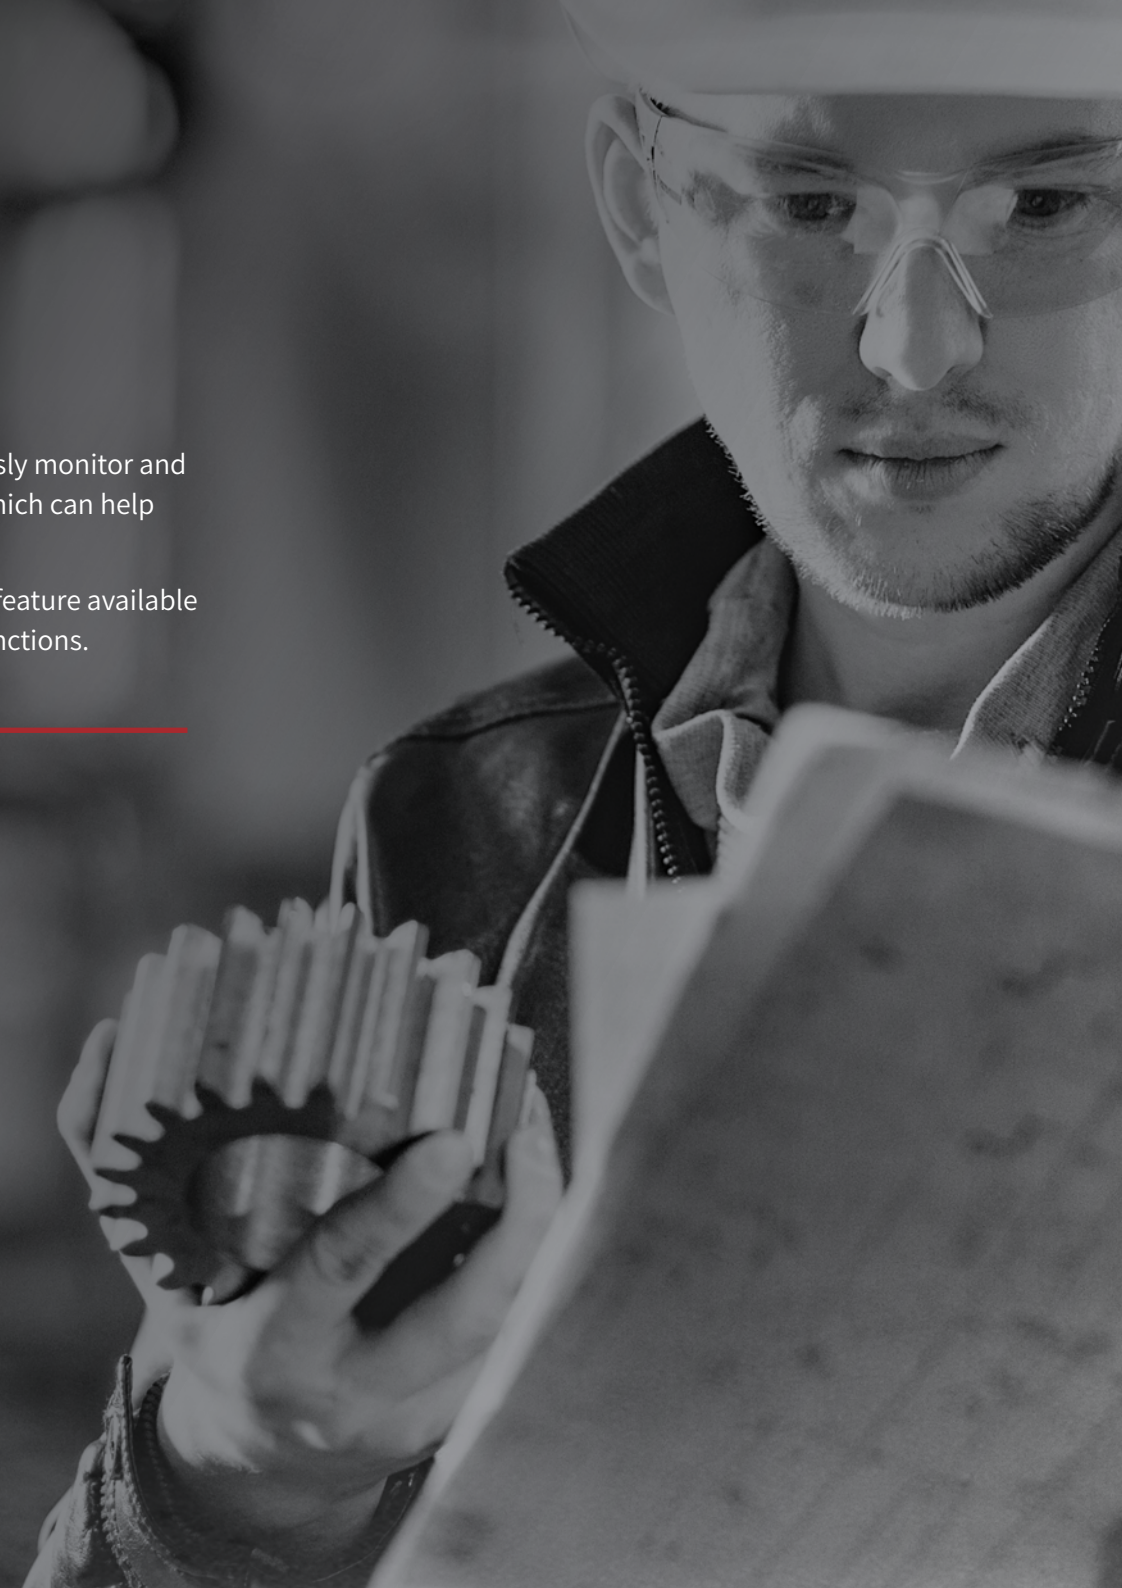




# Product Features


- Support a wide variety of configuration, complying with every scenario.
- Support radiometric video output, providing robust temperature data for analysis
- Maximum temperature range expandable to 2000°C
- Compliant with multiple data transmission protocols, adaptive for connection integration



# World Class Suppliers




Mother board chip from  
**SAMSUNG**




Infrared detector from  
**Lynred**




FPGA from  
**Xilinx**



Power supply chip from  
**Texas Instruments**

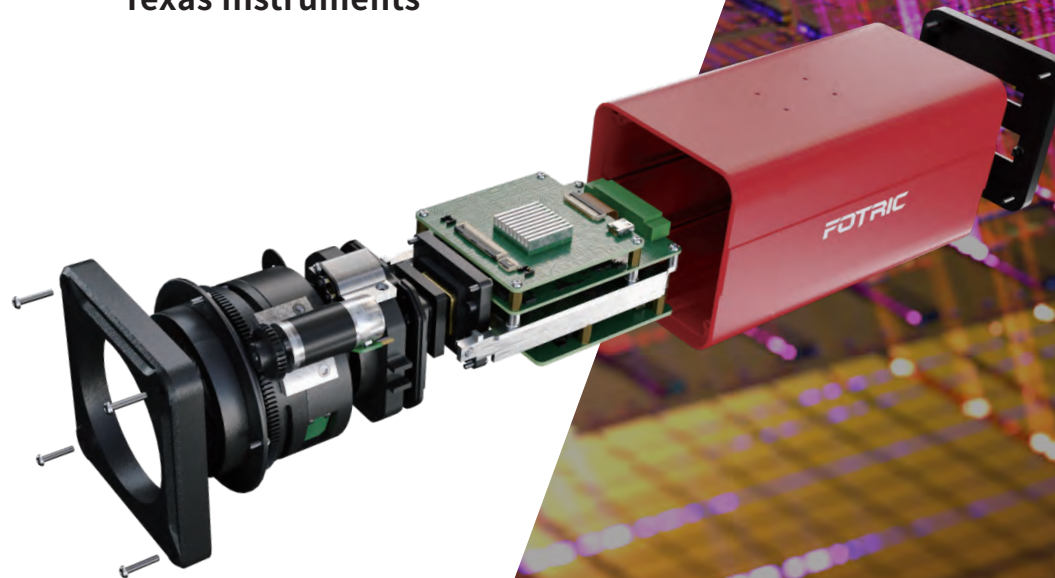

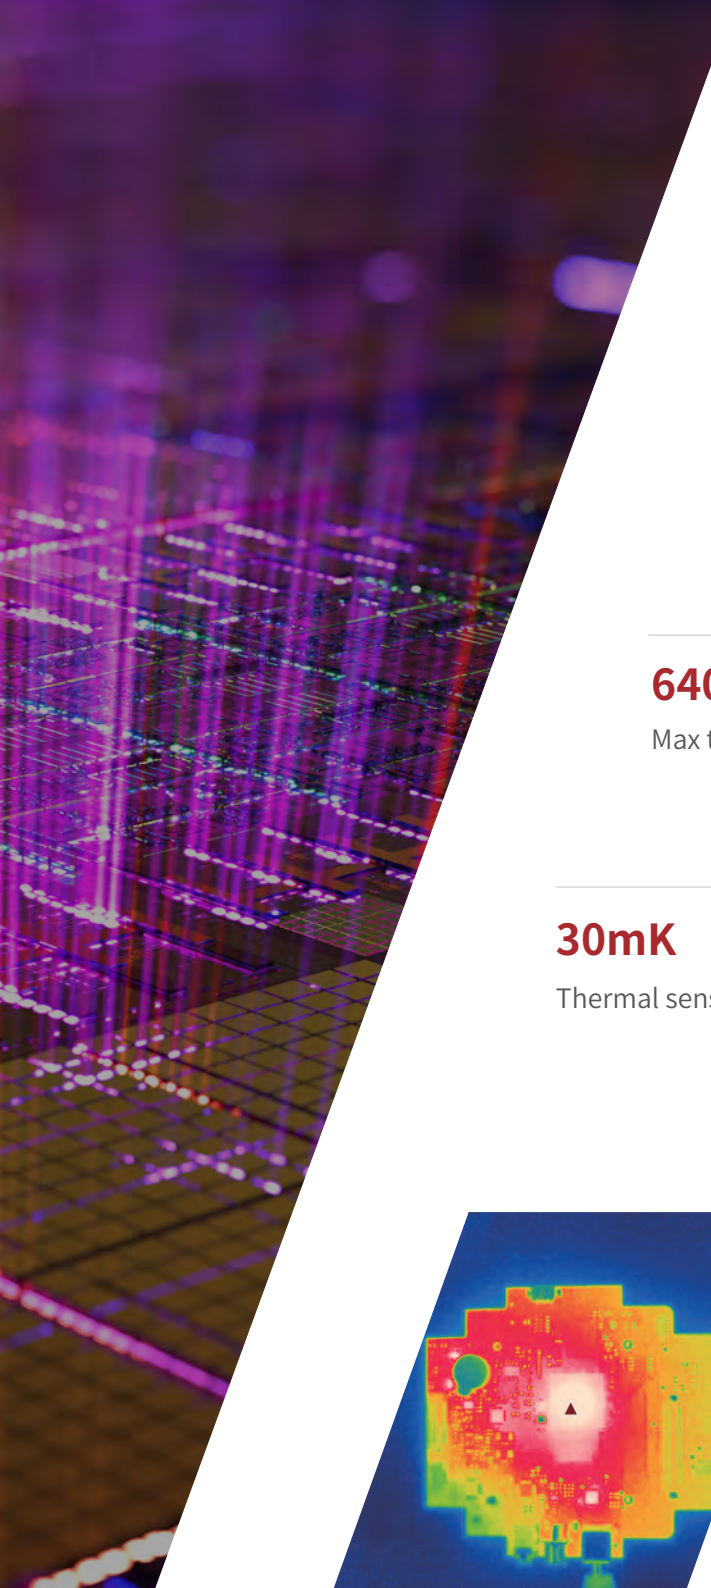

# Lively Image Accurate Measurement

**640\*480**

Max thermal resolution

**$\pm 2^{\circ}\text{C}/\pm 2\%$**

Accuracy

**30Hz**

Radiometric video stream

**30mK**




Thermal sensitivity

**$-20^{\circ}\text{C}\sim 2000^{\circ}\text{C}$**

Largest temperature range

**5spots 10lines 10areas**

Measurement tools

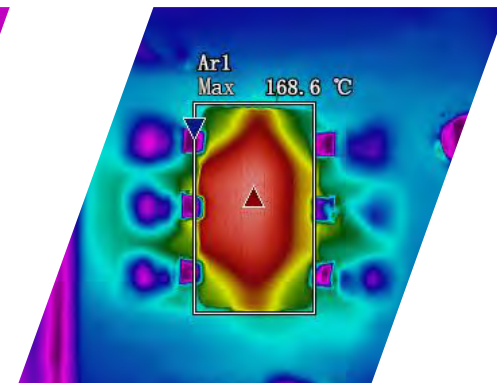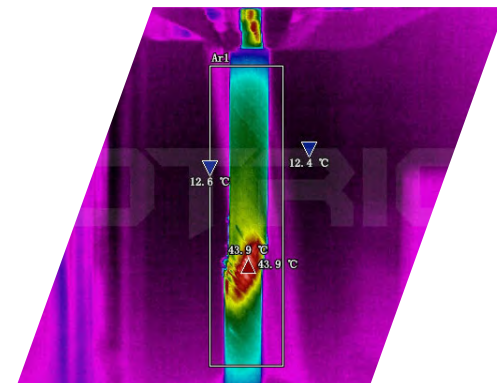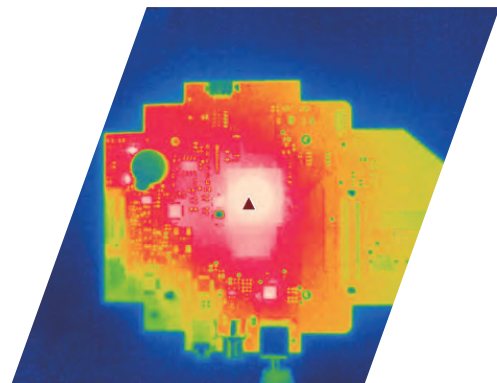

# More Options; More Liberty



## Multiple available models

Support resolution of 640\*480、384\*288、320\*240 and 160\*120, fulfilling every need from different environments



## Abundant lens options

Support 25°×18.7°、50°×37.5°、12°×8.9°、7°×5.2° lenses, see the world from different angles



## Open source API software

The FOTRIC SDK offers users the possibility to create softwares tailored to their needs



# Specification

Model	628CH	626CH	628C	626C	625C	618C	616C	615C	613C	
<b>Basic Parameters</b>										
Thermal resolution	640*480	384*288	640*480	384*288	320*240	640*480	384*288	320*240	160*120	
Detector type	Uncooled focal plane array detector									
Thermal sensitivity	<30mk	<50mk	<30mk	<50mk	<50mk	<30mk	<50mk	<50mk	<60mk	
Detector pitch	17μm									
Spectral range	7.5μm-14μm									
FOV	Dependent on the lens configuration									
IFOV	Dependent on the lens configuration									
Minimum focus distance	Dependent on the lens configuration									
Focal distance	Dependent on the lens configuration									
Focus type	Automatic					Manual				
<b>Measurement Analysis</b>										
Temperature range	-20°C-150°C 0°C-650°C 300°C-2000°C	-20°C-150°C 0°C-650°C 300°C-2000°C	-20°C-150°C 0°C-650°C	-20°C-150°C 0°C-650°C	-20°C-150°C 0°C-350°C	-20°C-150°C 0°C-550°C	-20°C-150°C 0°C-550°C	-20°C-150°C 0°C-350°C	-20°C-150°C 0°C-350°C	
Accuracy	±2°C/±2%									
Measurement parameters	Emissivity; Ambient temperature; Reflected temperature; Relative humidity; Distance; External optics compensation									
Partial emissivity	Support									
<b>Image display</b>										
Palettes	10 standard palettes and 10 inverted palettes									
Image process	Non-uniform calibration, digital enhancement									
Mirror mode	Left-right, up-down, center									
Video compression	H.264									
Radiometric stream	<30mk	<50mk	<30mk	<50mk	<50mk	<30mk	<50mk	<50mk	<60mk	
Pan-tilt-zoom station compatibility	Support Pelco-D protocol									
Measurement tools	5 points, 10 lines and 10 regions, support Modbus output									
Software	AnalyzeIR; Open API FOTRIC SDK									

# Specification

Model	628CH	626CH	628C	626C	625C	618C	616C	615C	613C
<b>Network Connection</b>									
Ethernet type	10M/100M/1000M adaptive								
Network protocols	IPv4, UDP, TCP, RTSP, RTCP, RTP								
Simultaneous stream	Mainstream and substream: 10; Radiometric stream: 1								
IP connection interface	ONVIF								
<b>Electrical connection</b>									
Power connector	Screw-on wire terminal								
Network connector	Screw-on RJ45 with status indicator LED								
Alarm input/output	1 relay output, load capacity:24V, 1.5A; 1 optocoupler output:Voltage:3.3-24V, Max current: 35mA; 1 optocoupler input:Voltage:3.3-24V, Input current : 5mA-15mA								
Serial port	RS-485								
<b>Power system</b>									
Power supply	12V/24V DC, PoE								
Power consumption	4W	3W	4W	3W	3W	4W	3W	3W	3W
<b>Reliability and certificates</b>									
Safety standards	GB 4943.1-2011   EN 62368-1:2014+A11:2017;GB/T 19870-2018								
Electromagnetic compatibility	GB/T 18268.1-2010   EN 61326-1:2013 GB 17625.1-2012   EN IEC 61000-3-2:2019 GB/T 17625.2-2007   EN 61000-3-3:2013/A1:2019 GB/T 19870-2018 GB 4824-2019 EN 55032:2015/A11:2020 EN 55035:2017 FCC CFR47 Part15 subpart B								
Protection level	IP40								
Impact	25g, GB/T 2423.5-2019   IEC 60068-2-27:2008								
Vibration	2g, GB/T 2423.10-2008   IEC 60068-2-6:2007								
RoHS compliant	Directive 2011/65/EU and amendment (EU) 2015/863								



# Specification

Model	628CH	626CH	628C	626C	625C	618C	616C	615C	613C
<b>Physical parameters</b>									
Working temperature	-20°C-65°C								
Storage temperature	-40°C-70°C								
Relative humidity	<90%								
Size(mm)	164.6*80*79 (standard lens)	157.25*80*79 (standard lens)	142.25*71*70 (standard lens)			112*68*60 (without lens)			
Weight (g)	993 (standard lens)	713 (standard lens)	718 (standard lens)	706 (standard lens)		485 (without lens or base)			
Outer casing material	Aluminum alloy								

# Optional lenses

Model	Parameters	Standard lens	Wide-angle lens	Telephoto lens	Model	Parameters	Standard lens	Wide-angle lens	Telephoto lens	Super wide-angle lens
628CH	FOV	25°* 18.7°	50°* 37.5°	12°* 8.9°	625C	FOV	21°* 15.6°	42°* 31.2°	10°* 7.4°	-
	I FOV	0.67mrad	1.39mrad	0.32mrad		I FOV	1.13mrad	2.07mrad	0.57mrad	-
	Minimum focus distance	0.5m	0.7m	5m		Minimum focus distance	0.3m	0.3m	1m	-
	Focal distance	25.3mm	-12.2mm	-53.9mm		Focal distance	15mm	8.2mm	-30mm	-
626CH	FOV	25°* 18.7°	50°* 37.5°	12°* 8.9°	618C	FOV	29°* 22°	45°* 34°	18°* 13°	92°* 74°
	I FOV	1.13mrad	2.32mrad	0.53mrad		I FOV	0.78mrad	1.21mrad	0.49mrad	2.93mrad
	Minimum focus distance	0.5m	0.5m	1.5m		Minimum focus distance	0.1m	0.3m	1m	0.3m
	Focal distance	15mm	7.34mm	-32.2mm		Focal distance	21.6mm	14mm	35mm	5.8mm
628C	FOV	25°* 18.7°	50°* 37.5°	12°* 8.9°	616C	FOV	30°* 22°	47°* 35°	15°* 11°	91°* 71°
	I FOV	0.68mrad	1.31mrad	0.34mrad		I FOV	1.3mrad	2.125mrad	0.68mrad	4.59mrad
	Minimum focus distance	0.3m	0.3m	1m		Minimum focus distance	0.3m	0.3m	2m	0.3m
	Focal distance	25mm	13mm	50mm		Focal distance	13mm	8mm	25mm	3.7mm
626C	FOV	25°* 18.7°	50°* 37.5°	12°* 8.9°	615C	FOV	25°* 18.7°	39°* 29°	13°* 9°	76°* 59°
	I FOV	1.13mrad	2.07mrad	0.57mrad		I FOV	0.68mrad	2.125mrad	0.68mrad	4.59mrad
	Minimum focus distance	0.3m	0.3m	1m		Minimum focus distance	0.3m	0.3m	2m	0.3m
	Focal distance	15mm	8.2mm	-30mm		Focal distance	25mm	8mm	25mm	3.7mm
626C	FOV	25°* 18.7°	50°* 37.5°	12°* 8.9°	613C	FOV	28°* 21°	50°* 37.5°	-	-
	I FOV	1.13mrad	2.07mrad	0.57mrad		I FOV	3.06mrad	5.43mrad	-	-
	Minimum focus distance	0.3m	0.3m	1m		Minimum focus distance	0.1m	0.1m	-	-
	Focal distance	15mm	8.2mm	-30mm		Focal distance	5.56mm	3.13mm	-	-

# Innovation Excellence Integrity

Equipment described herein may require EU, US and UNSC authorization for export purposes.

Imagery for illustration purposes only.

Specifications are subject to change without notice.

FOTRIC INC. All Rights reserved.

Update 22/07/07

[info@fotric.com](mailto:info@fotric.com)

[www.fotric.com](http://www.fotric.com)