SIELCO SISTEMI srl
via Roma, 24 - 22070 Guanzate (CO) – Italy
Tel: +39 031899671 – Fax: +39 031976966
e-mail: info@sielcosistemi.com
website: http://www.sielcosistemi.com

Distributed I/O device in 6 DIN module box
4 inputs for RTD over RS-485

SS 10014

FEATURES
- **Modbus Slave device on RS-485**
- **Modbus RTU/ Modbus ASCII protocol**
- **4 input channels**
- **Input configurable for RTD, Resistance and Potentiometer**
- **Communication parameters configurable by dip-switches**
- **Watch-Dog Alarm**
- **Remotely Configurable**
- **1500 Vac 3-ways Galvanic Isolation**
- **LEDs of signalling on front side for power supply and communication**
- **Connection by removable screw terminals**
- **High Accuracy**
- **CE mark**
- **DIN rail mounting in compliance with EN-50022**

GENERAL DESCRIPTION

The device SS10014 converts up to 4 analogue input signals into engineering units in digital format. The data are transmitted with MODBUS RTU/ASCII protocol over the RS-485 network.
It is possible to connect on input RTD, Potentiometer or Resistance sensors.
The device guarantees high accuracy and stable measure versus time and temperature.
To ensure the plant safety, a Watch-Dog timer alarm is provided.
The isolation between the parts of circuit removes eventual ground-loop effects, allowing the use of the device even in the heavy environmental conditions.
The device is housed in a 6 module DIN rough self-extinguishing plastic box for mounting on EN-50022 standard DIN rail.

COMMUNICATION PROTOCOLS

The device is designed to work with the MODBUS RTU/ ASCII protocol: standard protocol in field-bus; allows to directly interface SS10000 series devices to the larger part of PLCs and SCADA applications available on the market.

USER INSTRUCTIONS

Before to install the device, please read the “Installation Instruction” section.
It is possible to configure the device in two modes: by the dip-switches located on the front of the device or via software using the INIT modality.
Connect the terminal INIT to the terminal REF; at the power-on the device will be automatically set in the configuration set-up.
Connect power supply, serial bus and analogue inputs as shown in the “Wiring” section.
The LEDs state depends on the working condition of the device: see the "Light Signalling" section to verify the device working state. .
To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)

INPUT

Input type	Min	Max
RTD 2 or 3 wires		
Pt100	-200 °C	850 °C
Pt1000	-200 °C	200 °C
Ni100	-60 °C	180 °C
Ni1000	-60 °C	150 °C
RES. 2 or 3 wires		
Low	0 Ω	500 Ω
High	0 Ω	2000 Ω
POT (Nominal Res)		
Low	20 Ω	500 Ω
High	20 Ω	2000 Ω

(1) referred to the input Span (difference between max. and min.)

Input Accuracy (1)	
RTD	±0.05 % f.s.
Resistance	±0.05 % f.s.
Potentiometer	±0.05 % f.s.
Linearity (1)	
RTD	± 0.1 % f.s.
Lead wire resistance influence	
RTD/res.3 wires(50 Ω max balanced)	0.05 f.s. % / Ω
RTD excitation current	
Typical	0.350 mA
Thermal drift (1)	
Full scale	± 0.01 % / °C
Sample time	0.5 ÷ 1 sec.
Data Transmission (RS-485 asynchronous serial)	
Baud Rate	115.2 Kbps
Max. distance	1.2 Km – 4000 ft
Warm-up time	3 min.

POWER SUPPLY	
Power supply voltage	10 .. 30 Vdc
Reverse polarity protection	60 Vdc max
Current consumption	
(operative)	35 mA max@24Vdc 45 mA max@10Vdc
ISOLATION	
Between all the ways	1500 Vac, 50 Hz, 1 min
ENVIRONMENTAL CONDITIONS	
Operative Temperature	-10°C .. +60°C
Storage Temperature	-40°C.. +85°C
Humidity (not condensed)	0 .. 90 %
Maximum Altitude	2000 m
Installation	Indoor
Category of installation	II
Pollution Degree	2
MECHANICAL SPECIFICATIONS	
Material	Self-extinguish plastic
IP Code	IP20
Wiring	wires with diameter 0.8÷2.1 mm^2 /AWG 14-18
Tightening Torque	0.5 N m
Mounting	in compliance to DIN rail standard EN-50022
Weight	about 200 g.
CERTIFICATIONS	
EMC (for industrial environments)	
Immunity	EN 61000-6-2
Emission	EN 61000-6-4

INSTALLATION INSTRUCTIONS

The SS10014 is suitable for fitting to DIN rails in the vertical position.
For optimum operation and long life follow these instructions:

When the devices are installed side by side it may be necessary to separate them by at least 5 mm in the following case:
- If panel temperature exceeds 45°C and power supply voltage 10 Vdc.

Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.
Install the device in a place without vibrations.

Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters etc...) and to use shielded cable for connecting signals.

WIRING

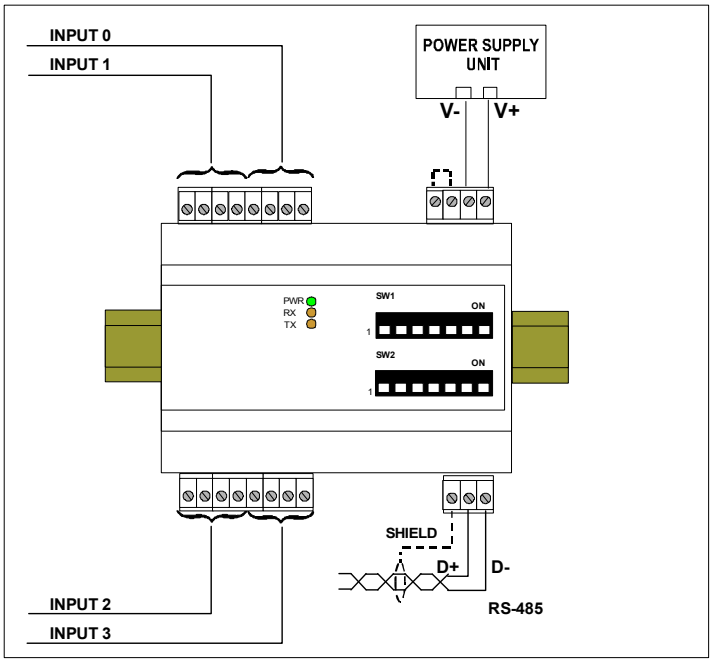

LIGHT SIGNALLING

LED	COLOUR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered
		BLINK	~1 sec. - Watch-Dog alarm condition occurred
RX	ORANGE	BLINK	Stream of data over receiving line of RS-485
		OFF	No data over receiving line of RS-485
TX	ORANGE	BLINK	Stream of data over transmission line of RS-485
		OFF	No data over transmission line of RS-485

ISOLATION STRUCTURE

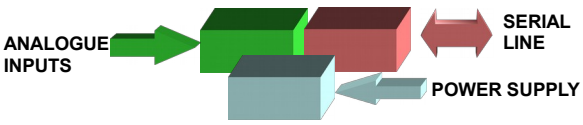

MECHANICAL DIMENSIONS (mm)

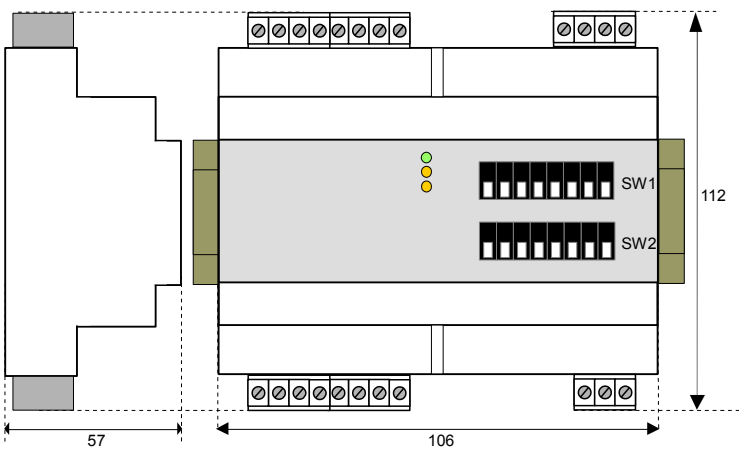

CONNECTIONS

ANALOGUE INPUTS

RTD/RES 2 WIRES

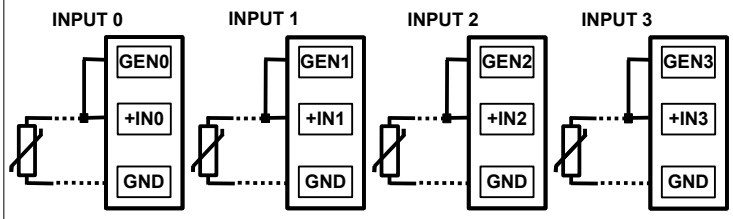

RTD/RES 3 WIRES

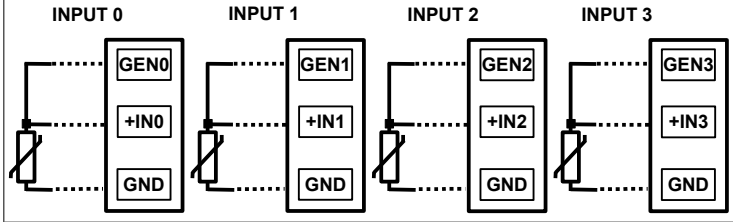

POTENTIOMETER

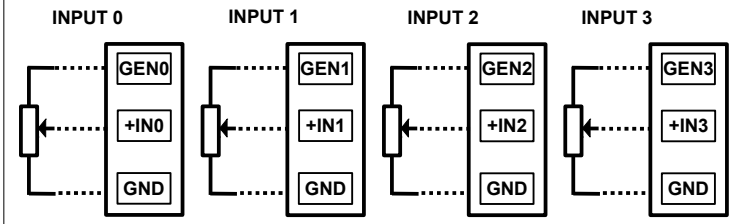

NOTE: the input channels are not isolated between them (terminal GND is common)

SERIAL LINE RS-485

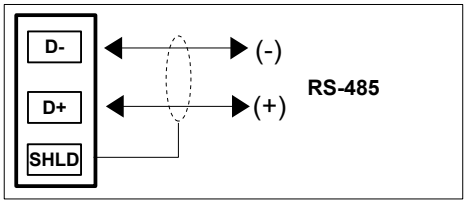

POWER SUPPLY

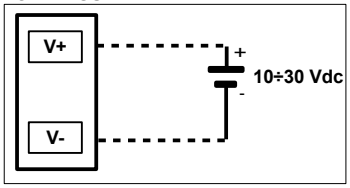

INIT



DIP-SWITCHES : TABLES OF CONFIGURATION

Warning: set all the dip-switches in OFF position to access to the device in EEPROM modality (the device will follow all the communication parameters set by software) or INIT. Power-off the device before to change the set of the dip-switches.

TAB.1 Mode settings (Pos.1)



TAB.2 Parity settings (Pos.2 LSB; Pos.3 MSB)



TAB.3 Baud rate settings (Pos.4 LSB; Pos.6 MSB)

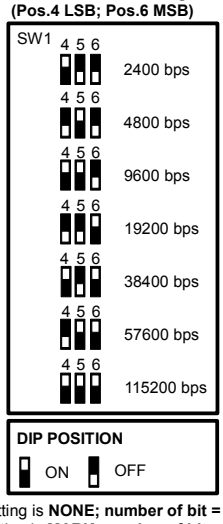

TAB.4 Address Selection 1÷247 (Pos.1 LSB; Pos.8 MSB)

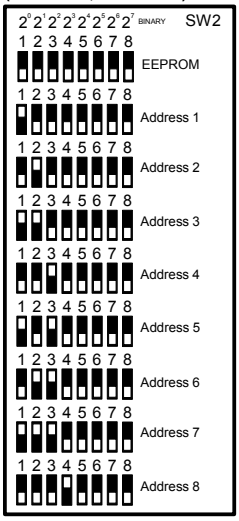

Note (*):
- in **Modbus RTU** Mode the setting is **NONE; number of bit = 8**
- in **Modbus ASCII** Mode the setting is **MARK; number of bit = 7**

HOW TO ORDER

The SS10014 can be supplied as requested from the customer.
Refer to the section "Technical Specifications " for the input types available.

SS 10014 / Pt100 — Input type

Sielco Sistemi s.r.l. reserves its right to modify the characteristics of its products totally or in part without warning at any time.