



Thermo GEAR


G 120EX/G 100EX Series

New EX Series with Upgraded Performance!!

- ▶ Measures high temperature up to 1500°C
- ▶ Resolution: 0.04°C (with S/N improvement at 30°C)
- ▶ 'Averaging Improvement' function for better image quality
- ▶ Standard grip belt for better safety & operability


Wide-Angle Shot

World's First *1
Panoramic Thermal Image *2

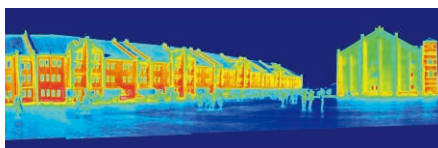


Thermal Image Movie

Direct Recording on SD Card
in Fully Radiometric
(G120EX:10fps, G120EXD:8.5fps)*2




IR/Visual Integrated Display

Split-Screen, Fusion, Alpha Blending

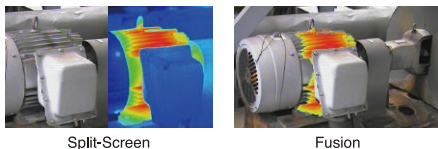

Averaging Improvement

Minimizes residual images
of moving object
while averaging

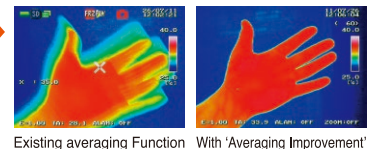

Alarm Function

World's First *1
Vibration*2
Sound and Display

High Temp Measurement

Up to 1500°C,
Standard

3.5 inch LCD Screen

Tilting Display for Flexible
Easy Shooting Posture

Wide Field of View

Ideal for Short Distance
32°(H) x 24°(V)

Macro Shot

Min. Focus Distance:10cm

Easy Operation


GUI and Joystick for
Intuitive Operation,
Auto Focus/ Level-Sense

*1:World's first [Panoramic Thermal Image Shooting Function],[Vibration Alarm Function] (Surveyed by our company at end of December,2009.) *2:Provided on G120EX Series only.

Specifications

Item	G120EX	G120EXD	G100EX	G100EXD
Basic Performance				
Infrared Detector	Uncooled Focal Plane Array (microbolometer)			
Spectral Range	8 to 14μm			
Measuring Range	-40 to 1500°C			
Sensitivity (NETD)	0,04°C at 30°C (with S/N improvement)			
Accuracy	±2°C or ±2%*1			
Frame Rate	60Hz	8,5Hz	60Hz	8,5Hz
Detector Pixels	320(H)×240(V) pixels			
Field of View	32°(H)×24°(V) (with standard lens)			
Spatial Resolution	1.78mrad			
Focal Distance	10cm to infinity (with standard lens)			
Focus	Auto / Manual			
Image Display				
Auto Functions	Auto-scale, Auto-focus, Full-auto			
Color Palet	Rainbow, Iris, Brightness, Hot iron, Hot white, Hot black			
Gradation	256/16/8 tones			
Visual Camera	CMOS camera 2M pixels			
	Fusion	Provided		
	Picture-In-Picture	Provided		
	Alpha Blending	Provided		
	Split-Screen	Provided		
Display Functions	Digital Zoom	1 to 4 times continuous zoom		
	Multi-Image-Display	Display 9 images(replay mode)		
Image Quality Improvement	Averaging	Off / Σ4/ Σ8/ Σ16 (with ghost rejection)		
	Edge Enhancement	Provided	N/A	
	Filtering	Provided		
Measuring Functions				
Point Temperature	1 Center Point, 5 Movable Points			
	Temperature Search	MAX/MIN		
	Delta Temperature	Provided		
Temperature Display in Assigned Region	MAX, MIN and AVG in Box (for up to 5 Boxes)			
Line Profile	Horizontal, Vertical or Horizontal & Vertical			
Alarm function	Alarm Sound, Alarm Display, Color Alarm(ISO)			
	Vibration Alarm	Provided	N/A	
	Alarm Recording	Provided		
	Alarm Output	Provided		
Temperature Correction Function	Emissivity, Environment/Background, Distance, NUC			
	Emissivity	Multi-Point Correction, Emissivity Reverse Calculation, Emissivity Table		
Storage Device	SD Card, Compatibility SDHC			
Data Storage	Still Image : JPEG with Temperature Data (14 bit), Movie : SVX file (exclusive), Visual Image Simultaneously Recorded		Still Image : JPEG with Temperature Data (14 bit), Visual Image Simultaneously Recorded	
	Panoramic Image	Horizontal Equivalent to 100°, Vertical Equivalent to 75°		N/A
	Movie Recording	Max 10 fps in SD Card	Max 8.5 fps in SD Card	N/A
	Interval Recording	3s to 60min, Visual Image Simultaneously Recorded		
	Voice Annotation	30sec Recording/Replay per Image		
	Text Annotation	Annotate up to 128 Characters with each Thermal Image Import Characters from SD Card		
Interface	USB2.0			
	Video output	NTSC or PAL (Simultaneous use with LCD not available)		
	Alarm output	Provided (Contact Closure, No Voltage)		
Auxiliary Measuring Functions				
Graphical User Interface's Supported Language	English, French, Spanish, German, Italian, Portuguese, Russian, Finnish, Danish, Norwegian, Swedish, Dutch, Chinese (Traditional, Simplified), Korean and Japanese.			
Display	3.5" LCD Monitor (with Tilt and Brightness Adjustment Available)			
Auxiliary	Laser Pointer	Provided (Class-2 Red color) / N/A		
	LED Light	Provided		
	Operating temperature / Humidity	-15°C to 50°C, 90%RH		
Environment Resistance	Vibration / Shock	29.4m/sec ² (3G), 294m/sec ² (30G)		
	EMC	Compliant to CE (Class A)		
	Dust / Splash Proof	IP54		
Others				
Battery Operation	4hours (typ), Rechargeable Li-Ion battery			
AC Power	100V to 220V AC, 50/60Hz			
Power Consumption	4.3W (typ)			
Dimensions	Approx. 212mm(H) × 75mm(W) × 138mm(D) (excluding projections)			
Weight	Approx. 800g (including Battery Pack)			
Standard Accessories	AC Adapter x1, Battery Charger x1, Rechargeable Li-Ion Battery x1, SD Card x1, USB Cable x1, Wristband x1, Grip Belt x1, Software x1, Operation Manual x1, and Carrying Case x1			
Standard Software	InfReC Analyzer NS9500LT			

*1 Operating Temperature : 0 to 40°C



■ Listed specifications, appearance and design are subject to change without notice. ■ Company and commodity names are trade names or registered trade marks of each company. ■ NIPPON AVIONICS Co., Ltd. will not be responsible for any damage of infrared detectors due to incoming strong light (e.g. laser) through lens(es). ■ This product is subject to Japanese Export Control Law. Depending on its destination, prior assessment and authorization may be required. When exporting from country of initial purchase destination, please be sure to follow that country's export regulations as it may require an export permit beforehand.

PC Software

InfReC Analyzer NS9500 Lite

Thermal Image Processing and Report Generator Software
Easily identifiable menu system guides you to intuitive operation

[Features]

• **Easy Report Generation (MS-WORD/MS-EXCEL Format)**

• **Rich Processing Functions**

Fusion Display of Thermal Image / Visual Image
Subtraction Function for Thermal Image

Panoramic Composite Function for Thermal Image
Radiation Heat Quantity Analysis*1

Length Measuring/Area Calculation Function*1
for Thermal Image

Trend Graph Display*1


Line Profile Display

Drawing Function for Designated Point /
Line / BOX / Circle*1 / Polygon Shape*1


Analysis for Max./Min./Peak Temperature

*1: Optional Software Model NS9500 Standard only

* Compatible PC configuration, OS system and associated application software are to be consulted beforehand. Some old or new system might not be supported.



Trend Graph Display



Radiation Heat Quantity Analysis




Panoramic Composite Function for Thermal Image

Options

Options	Model	Specifications / Remarks
2 x Telephoto Lens	IRL-TX02A-B	16"(H) x 12"(V) 0.89mrad (f=28mm)
Rechargeable Battery Pack	T2UR18650F5928B	2,500mAh, 4 Hours of Continuous use (typical)
Battery Charger	NC-LSC05-110V / NC-LSC05-220V	110v or 220v
LCD Hood	IRU-F01A	
Video cable	FVC-135A	3.5mm plug, 1.5m
Tripod (small)	U9800	
InfReC Analyzer Standard	NS9500STD-B	PC Software
Portable Power for longer operation	TVB-C501	Case for 2 extra batteries (battery not included)
2 year warranty	IRS-GG100 A-B	

Dimensions of Measuring Distance and Field of View (Standard 14mm Lens)

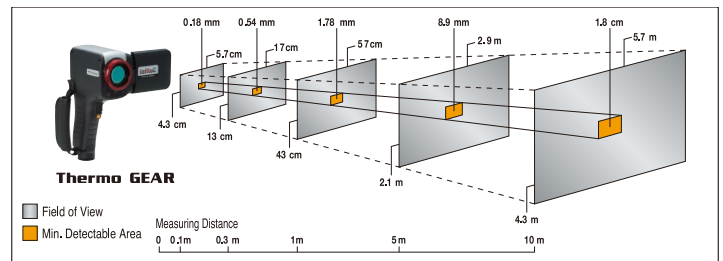

NIPPON AVIONICS has long experience and expertise in developing infrared cameras since the early 1970's.

There is a wide range of portable and fixed mount thermal imagers available. To find out more, visit us at : www.avio.co.jp/english/ or contact our local distribution partners.



NIPPON AVIONICS CO., LTD.

Infrared & Measuring Equipment Division

1-5, Nishi-Gotanda 8-chome, Shinagawa-ku,
Tokyo 141-0031 Japan

Phone : +81-3-5436-1614

Fax : +81-3-5436-1395

E-mail : product-irc-e@avio.co.jp

<http://www.avio.co.jp/english/>



WARNINGS & CAUTIONS

- Before using this product, please carefully read the provided Operation Manual "WARNINGS" & "CAUTIONS" section to ensure proper operation.
- Please do not place the product in high temperature, high humidity or high inert gas environments.

Distributor: